



10/536987
PCT/GB2003/005227



INVESTOR IN PEOPLE

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

The Patent Office
Concept House
Cardiff Road
Newport
South Wales


REC'D 23 JAN 2004
NP10 8QQ PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

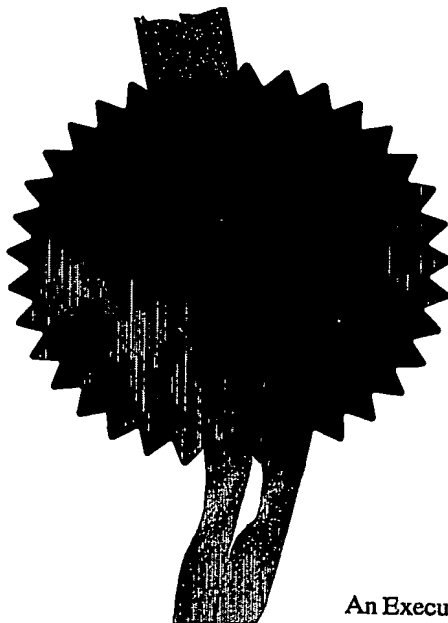

Signed

P. Mahoney

Dated 9 January 2004

**PRIORITY
DOCUMENT**
SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

An Executive Agency of the Department


for Trade and Industry

Patents Form 1/77

Patents Act 1977
(Rule 16)



05DEC02 E768607-1 000192
P01/7700 0.00-0228306.7

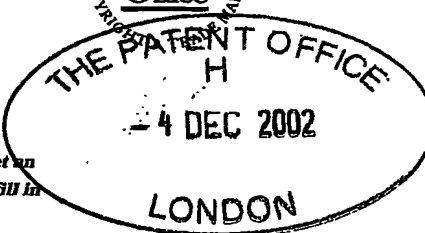

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference	P86207A PEJ		
2. Patent application number (The Patent Office will fill in this part)	0228306.7		- 4 DEC 2002
3. Full name, address and postcode of the or of each applicant (underline all surnames)	Rhodia Organique Fine Limited PO Box 46, St Andrew's Road Avonmouth, Bristol BS11 9YF United Kingdom		
Patents ADP number (if you know it)	8482499001		
If the applicant is a corporate body, give the country/state of its incorporation	UK		
4. Title of the invention	CHILLER REFRIGERANTS		
5. Name of your agent (if you have one)	J.A. KEMP & CO.		
"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)	14 South Square Gray's Inn London WC1R 5JJ		
Patents ADP number (if you know it)	26001		
6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number	Country	Priority application number (if you know it)	Date of filing (day / month / year)
7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application	Number of earlier application	Date of filing (day / month / year)	
8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if: a) any applicant named in part 3 is not an inventor, or b) there is an inventor who is not named as an applicant, or c) any named applicant is a corporate body. See note (d))	Yes		

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	14	✓
Claim(s)	3	✓
Abstract	1	✓
Drawing(s)	6 + 6	✓

Jme

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

J.A. Kemp

Date 4 December 2002

J.A. KEMP & CO.

12. Name and daytime telephone number of person to contact in the United Kingdom

PGA Ellis-Jones
020 7405 3292

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

CHILLER REFRIGERANTS

5

This invention relates to refrigerant compositions, particularly compositions which can be used for chillers.

Chillers require large amounts of cooling. Recently R22 (CHClF_2) has
10 been used for this purpose. However, there is the need for an alternative refrigerant, since R22 is an ozone depleter that will be phased out over the next decade, in accordance with the Montreal protocol.

Therefore, there is a requirement for a refrigerant that has similar properties to R22, but is not an ozone depleter. Of particular concern is that the
15 temperature/vapour pressure relationship for such a refrigerant should be sufficiently similar to R22 that it can be used in R22 equipment without having to change the control systems which are usually programmed in the factory making the chiller.

This is of particular concern for systems that have sensitive control devices,
20 which rely on both the inlet pressure to the expansion valve and the outlet pressure. These control systems are based on R22 properties. Therefore, if an R22 substitute does not have a temperature/vapour pressure behaviour similar to R22, the system will not operate correctly.

By similar we mean that the vapour pressure of the substitute should not
25 differ by more than $\pm 12\%$ and preferably not more than $\pm 6\%$ at any given mean evaporating temperature between -40°C to $+10^\circ\text{C}$.

It is also important that any such refrigerant has a similar capacity and efficiency as R22.

By similar capacity we mean a capacity that is no more than 20% lower
30 than R22 and preferably not more than 10% lower than R22 at mean evaporating temperatures between -35°C to -28°C . By similar efficiency we mean not more

than 10% lower and preferably not more than 5% lower at mean evaporating temperatures between -35° to -28°C.

5 According to the present invention there is provided a refrigerant composition which comprises:

(a) pentafluoroethane, trifluoromethoxydifluoromethane or hexafluorocyclopropane, or a mixture of two or more thereof, in an amount of from 60 to 70% by weight based on the weight of the composition,

10 (b) 1,1,1,2- or 1,1,2,2-tetrafluoroethane, trifluoromethoxypentafluoroethane, 1,1,1,2,3,3-heptafluoropropane or a mixture of two or more thereof, in an amount of from 26 to 36% by weight based on the weight of the composition and

(c) an ethylenically unsaturated or saturated hydrocarbon, optionally
15 containing one or more oxygen atoms, with a boiling point from -12°C to +10°C, or a mixture thereof, or a mixture of one or more said hydrocarbons with one or more other hydrocarbons, said mixture having a bubble point from -12°C to +10°C, in an amount from 1% to 4% by weight based on the weight of the composition. It has
20 surprisingly been found that these particular formulations have the condition of properties which enable them to be used as a "drop in" replacement for R22.

The percentages quoted above refer, in particular, to the liquid phase. The corresponding ranges for the vapour phase are as follows:

(a) 75 to 87% (b) 10-28% and (c) 0.9 - 4.1%, all by weight based on the weight of the composition. These percentages preferably apply both in the liquid and
25 vapor phases.

The present invention also provides a process for producing refrigeration which comprises condensing a composition of the present invention and thereafter
30 evaporating the composition in the vicinity of a body to be cooled. The invention also provides a refrigeration apparatus containing, as refrigerant, a composition of the present invention.

Component (a) is present in an amount from 60 to 70% by weight based on

the weight of the composition. Preferably, the concentration is 62 to 67%, especially above 64% and up to 66%, by weight. Preferably, component (a) is R125 (pentafluoroethane) or a mixture containing at least an half, especially at least three quarters (by mass) of R125. Most preferably component (a) is R125 (alone).

5 Component (b) is present in the composition in an amount from 26 to 36%, especially 28 to 32%, by weight based on the weight of the composition. Component (b) is preferably a mixture containing at least an half, especially at least three quarters (by mass) of R134a (1,1,1,2-tetrafluoroethane). Most preferably component (b) is R134a (alone).

10 The weight ratio of component (a): component (b) is desirably at least 1.5:1, preferably 1.5:1 to 3:1 and especially 1.8:1 to 2.2:1.

 Component (c) is a saturated or ethylenically unsaturated hydrocarbon, optionally containing one or more oxygen atoms, in particular one oxygen atom, with a boiling point from -12°C to +10°C, especially -12°C to -5°C or a mixture thereof.

15 Preferred hydrocarbons which can be used possess three to five carbon atoms. They can be acyclic or cyclic. Acyclic hydrocarbons which can be used include propane, n-butane, isobutane and ethylmethyl ether. Cyclic hydrocarbons which can be used include methyl cyclo propane. Preferred hydrocarbons include n-butane and isobutane, with n-butane being especially preferred. Component (c) can also be a

20 mixture of such a hydrocarbon with one or more other hydrocarbons, said mixture having a bubble point from -12°C to +10°C, especially -12°C to -5°C. Other hydrocarbons which can be used in such mixtures include pentane, isopentane, propene, dimethyl ether, cyclobutane, cyclopropane and oxetan.

 The presence of at least one further component in the composition is not

25 excluded. Thus although, typically, the composition will comprise the three essential components, a fourth component, at least, can also be present. Typical further components include other fluorocarbons and, in particular, hydrofluorocarbons, such as those having a boiling point at atmospheric pressure of at most -40°C, preferably at most -49°C, especially those where the F/H ratio in the molecule is at least 1,

30 preferably R23, trifluoromethane and, most preferably, R32, difluoromethane. In

general, the maximum concentration of these other ingredients does not exceed 10% and especially not exceeding 5% and more especially not exceeding 2%, by weight, based on the sum of the weights of components (a), (b) and (c). The presence of hydrofluorocarbons generally has a neutral effect on the desired properties of the formulation. Desirably one or more butanes, especially n-butane and/or iso-butane, represents at least 70%, preferably at least 80% and more preferably at 90%, by weight of the total weight of hydrocarbons in the composition. It will be appreciated that it is preferable to avoid perhalocarbons so as to minimise any greenhouse effect and to avoid hydrohalogenocarbons with one or more halogen heavier than fluorine. The total amount of such halocarbons should advantageously not exceed 2%, especially 1% and more preferably 0.5%, by weight.

According to a preferred embodiment, the composition comprises, as component (a) 62 to 67% based on the weight of the composition of pentafluoroethane, as component (b) 3 to 35% by weight based on the weight of the composition of 1,1,1,2-tetrafluoroethane and, as component (c), butane or a said mixture of hydrocarbons comprising butane. When component (c) is a mixture the concentration of butane in the mixture is preferably at least 50% by weight, especially at least 70% by weight, more preferably at least 80% by weight and even more preferably at least 90% by weight, based on the weight of the composition. The other component of the mixture is preferably pentane.

It has been found that the compositions of the present invention are highly compatible with the mineral oil lubricants which have been conventionally used with CFC refrigerants. Accordingly the compositions of the present invention can be used not only with fully synthetic lubricants such as polyol esters (POE), polyalkyleneglycols (PAG) and polyoxypropylene glycols or with fluorinated oil as disclosed in EP-A-399817 but also with mineral oil and alkyl benzene lubricants including naphthenic oils, paraffin oils and silicone oils and mixtures of such oils and lubricants with fully synthetic lubricants and fluorinated oil.

The usual additives can be used including "extreme pressure" and antiwear additives, oxidation and thermal stability improvers, corrosion inhibitors, viscosity

index improvers, pour point depressants, detergents, anti-foaming agents and viscosity adjusters. Examples of suitable additives are included in Table D in US-A-4755316.

5 The following Examples further illustrate the present invention.

Examples

10

The samples used for testing are detailed below:

Butane (3.5%) blend: R125/134a/600 (65.0/31.5/3.5)

Isobutane (3.5%) blend: R125/134a/600a (64.9/31.7/3.4)

15

Equipment and experimental

20

The samples, each approximately 600g, used for the determination of the vapour pressures were prepared in aluminium disposable cans (Drukenbehalter - product 3469), which were then fully submerged in a thermostatically controlled water bath. For each determination the can was charged with about 600g. A maximum of two samples could be processed at any one time. The bath temperature was measured using a calibrated platinum resistance thermometer (152777/1B) connected to a calibrated Isotech TTI1 indicator. Pressure readings were taken using the two calibrated Druck pressure transducers, DR1 and DR2.

25

30

The temperature of the bath was set to the lowest temperature required and it was then left until it had cooled. When the temperature and pressure had remained constant for at least a quarter of an hour they were then recorded. Further

temperature and pressure readings were taken in increments of 5°C to a maximum of 50°C, each time ensuring that they were steady for at least a quarter of an hour before recording them.

5 The data obtained does not give the dew point and as such does not give the glide. An approximate evaluation of the glide can be obtained by using the REFPROP 6 program. The relationship of the glide to the bubble point can be represented by a polynomial equation. This equation can now be used to give an approximate glide for the experimentally determined bubble points. This is effectively a normalisation of
10 the calculated glide to the experimentally determined data. The dew point pressures can then be approximated by subtracting the temperature glide from the temperature in the bubble point equation.

15 These equations are then used to obtain vapour/pressure tables. The experimental equation derived for the bubble points and the glide equation from REFPROP 6 are shown in Table 1.

Notes:

-
- 20 1. In this equation $x=1/T$, where T is the bubble point in Kelvin: $y= \ln(p)$, where p is the saturated vapour pressure in psia. To convert psia to MPa absolute pressure, multiply by 0.006895.
- 25 2. In this equation $x = t$, where t is liquid temperature (bubble point) in degree C and y = glide in degree C at the bubble point temperature.
-
3. The vapour pressures for R22 were obtained from the Ashrae handbook by interpolation.

Determination of the performance of the refrigerants on the low temperature (LT) calorimeter.

5 Equipment and general operating conditions

The performance of the refrigerants was determined on the low temperature (LT) calorimeter. The LT calorimeter is fitted with a Bitzer semi-hermetic condensing unit containing Shell SD oil. The hot vapour passes out of the compressor, through an oil separator and into the condenser. The discharge pressure at the exit of the compressor is kept constant by the means of a packed gland shut-off valve. This inevitably has an effect on the condensing pressure/temperature – the system is actually condensing at a temperature below 40°C. The refrigerant then travels along the liquid line to the evaporator.

15

The evaporator is constructed from 15mm Cu tubing coiled around the edges of a well-insulated 32-litre SS bath. The bath is filled with 50:50 glycol:water solution and heat is supplied to it by 3x1kW heaters controlled by a PID controller. A stirrer with a large paddle ensures that the heat is evenly distributed. The evaporating pressure is controlled by an automatic expansion valve.

20

The refrigerant vapour returns to the compressor through a suction line heat exchanger.

25

Twelve temperature readings, five pressure readings, compressor power and heat input are all recorded automatically using DasyLab.

The tests were run at a condensing temperature of 40°C and an evaporator superheat of 8°C ($\pm 0.5^\circ\text{C}$).

30

For R22 the temperature at the end of the evaporator was maintained at 8°C above the

temperature equivalent to the evaporating pressure (bubble point).

For the other refrigerants the temperature at the end of the evaporator was maintained at 8°C above the temperature equivalent to the evaporating pressure (Dew point)

5

The mean evaporator temperature for these refrigerants was calculated by taking the temperature equivalent to the evaporator pressure from the bubble point table and adding to that half the glide at that temperature.

10

When running the calorimeter the evaporating and condensing pressures are initially set to an approximate value along with the temperature of the bath. The calorimeter is then allowed time for the conditions to stabilise. During this period coarse adjustments can be carried out and it must also be monitored in order to make sure that sufficient heat is being put into the bath to avoid any liquid getting back to the compressor. When the

15

system is virtually steady fine adjustments of pressure and temperature are made until the calorimeter has stabilised at the required evaporating pressure with a condensing pressure equivalent to 40°C and an evaporator superheat of 8°C. (Note – the superheat is measured from the third evaporator outlet)

20

The run is then commenced and run for a period of one hour, during which time no adjustments are made to the system, except for possibly minor changes to the condensing pressure to compensate for fluctuations in the ambient temperature.

25

Specific experimental details for each refrigerant

R22: The calorimeter was charged with R22 (3.5kg into the liquid receiver). Ten data points were obtained between the evaporating temperatures of -38°C and -22°C.

Butane (3.5%) blend: Approximately 3.55kg were charged into the liquid receiver and five data points were obtained between the mean evaporating temperatures of -38°C and -22°C .

5 **Isobutane (3.5%) blend:** Approximately 3.48kg of the blend were charged into the liquid receiver of the LT-calorimeter. Five data points between the mean evaporating temperatures of -38°C and -22°C were obtained.

10 **Results**

The results obtained are summarised in Tables 2-4. Mean Ev. Temp = Mean evaporation temperature; Air on condenser = temperature of the air blowing over the condenser; Press = pressure.

15

Comments and discussion on the experimental results

20 The results obtained are shown graphically in Graphs 1 to 6. Graph 1 shows the saturated vapour pressures for the blends investigated along with that for R22. The graph shows that the vapour pressures of the blends are only slightly higher than that for R22.

25 Graph 2 shows a comparison of the capacities with respect to R22 at a mean evaporating temperature of -30°C – a typical temperature at which these blends would be expected to operate. At this temperature the butane blend is only 4% down on capacity against R22, whereas the capacity of isobutane blend is slightly inferior, being 5.5% down on R22.

The COP results obtained are shown in Graph 3. This graph shows that at a mean evaporating temperature of -30°C the COP values of both the hydrocarbon blends are less than 1% down on R22.

5 In Graph 4, the capacity is fixed to that of R22 at the evaporating temperature of -30°C . The COPs at this constant capacity for the different refrigerants can now be compared. The graph shows that both the butane blend (by 2.5%) and the isobutane blend (by 3.0%) are more efficient than R22 for this given capacity.

10 The capacity of the hydrocarbon blends relative to R22 is shown in Graph 5. The lines for the two blends are parallel to one another and the capacities are similar with that of the isobutane blend being slightly inferior.

15 Graph 6 shows the COP of the RX blends relative to R22. The COP of R22 and that of the two blends is shown to be similar. The lines of the hydrocarbons blends cross over one another (and R22) at a mean evaporating temperature of -32°C showing the increase in the relative COP of R22 and the decrease in the relative COP of the isobutane blend. As before though the differences are only minimal.

Table 1 Results of the experimental SVP measurements and the glide from REFPROP 6

Description	SVP Equation (see note 1)	Glide equation (see note 2)
Butane (3.5%) blend R 1 2 5 / 1 3 4 a / 6 0 0 (65.0/31.5/3.5)	$y = -2347.46820x + 12.96325$ $R^2 = 0.99999$	$y = -0.02618x + 3.51740$ $R^2 = 0.99790$
Isobutane (3.5%) blend R 1 2 5 / 1 3 4 a / 6 0 0 a (64.9/31.7/3.4)	$y = -2356.045324x + 12999729$ $R^2 = 0.999956$	$y = -0.00001x^3 - 0.000012x^2 - 0.028998x + 3.628716$
R22	(see note 3)	Not applicable

TABLE 2 R22 CONDENSING AT 40°C IN LT-CALORIMETER

[illegible]

TABLE 3 BUTANE (3.5%) CONDENSING AT 40°C IN LT-CALORIMETER

[illegible]

TABLE 4 ISOBUTANE BLEND (3.5%) CONDENSING AT 40°C IN LT-CALORIMETER

Mean Ev. Temp °C	Discharge Temp °C	Air On Condenser °C	Discharge absolute Press Mpa	Condensing Temp °C	Evaporator Inlet absolute press. Mpa	Evap Temp BUBBLE °C	Evap Temp DEW °C	Compressor Power kwh	Capacity Heat Input kwh	C.O.P.	Evap. Superheat °C	Total Superheat °C
-37.7	114.6	23.1	1.544	40.0	0.023	-40.1	-35.3	1.033	0.596	0.58	8.0	49.0
-34.3	116.2	23.2	1.544	39.9	0.043	-36.6	-31.9	1.194	0.950	0.80	8.3	44.8
-29.8	113.1	22.2	1.544	40.0	0.072	-32.1	-27.5	1.353	1.361	1.01	8.5	40.1
-26.2	109.7	22.4	1.538	39.8	0.100	-28.4	-23.9	1.440	1.682	1.17	8.6	37.7
-21.5	106.4	24.2	1.562	40.4	0.140	-23.6	-19.3	1.622	2.252	1.39	8.2	35.4

CLAIMS

1. A refrigerant composition which comprises:

5 (a) pentafluoroethane, trifluoromethoxydifluoromethane or hexafluoro-cyclopropane, or a mixture of two or more thereof, in an amount of from 60 to 70% by weight based on the weight of the composition,

(b) 1,1,1,2- or 1,1,2,2-tetrafluoroethane, trifluoromethoxypentafluoroethane, 1,1,1,2,3,3-heptafluoropropane or a mixture of two or more thereof, in an amount of from 26 to 36% by weight based on the weight
10 of the composition and

(c) an ethylenically unsaturated or saturated hydrocarbon, optionally containing one or more oxygen atoms, with a boiling point from -12°C to +10°C, or a mixture thereof, or a mixture of one or more said hydrocarbons with one or more other hydrocarbons, said mixture having a bubble point from -12°C to +10°C, in an
15 amount from 1% to 4% by weight based on the weight of the composition.

2. A composition according to claim 1 in which component (c) is present in an amount from 3 to 4% by weight based on the weight of the composition.

3. A composition according to claim 2 in which component (c) is present in an amount of about 3.5% by weight based on the weight of the composition.

20 4. A composition according to any one of claims 1 to 3 in which component (c) is n-butane and/or isobutane.

5. A composition according to claim 4 in which component (c) is n-butane.

25 6. A composition according to any one of claims 1 to 3 in which component (c) is a mixture of n-butane and/or isobutane with another hydrocarbon.

7. A composition according to any one of the preceding claims in which component (a) is pentafluoroethane.

8. A composition according to any one of the preceding claims in which component (a) is present in an amount from 62 to 67% by weight based on the weight
30 of the composition.

9. A composition according to claim 8 in which component (a) is present in an amount above 64 up to 66% weight based on the weight of the composition.

10 A composition according to any one of the preceding claims in which component (b) is 1,1,1,2-tetrafluoroethane.

5 11. A composition according to any one of the preceding claims in which component (b) is present in an amount from 28 to 32% by weight based on the weight of the composition.

12. A composition according to any one of the preceding claims in which the weight ratio of component (a): component (b) is at least 1.5:1.

10 13. A composition according to claim 12 in which the said weight ratio is 1.5:1 to 3:1.

14. A composition according to any one of the preceding claims which comprises, as component (a) 62 to 67% by weight based on the weight of the composition of pentafluoroethane, as component (b) 3 to 35% by weight based on the weight of the composition of 1,1,1,2-tetrafluoroethane and, as component (c), butane or a said mixture of hydrocarbons comprising butane.

15 15. A composition according to any one of the preceding claims which comprises a further component.

20 16. A composition according to claim 15 in which the further component is a hydrofluorocarbon.

17. A composition according to claim 16 in which the hydrofluorocarbon has a boiling point at atmospheric pressure of at most -40°C.

18. A composition according to claim 16 or 17 in which the F/H ratio in the hydrofluorocarbon is at least 1.

25 19. A composition according to claim 18 in which the hydrofluorocarbon is difluoromethane or trifluoromethane.

20. A composition according to any one of claims 15 to 19 in which the further component is present in an amount not exceeding 5% by weight based on the weight of (a), (b) and (c).

21. A composition according to claim 20 in which the further component is present in an amount not exceeding 2% by weight based on the weight of (a), (b) and (c).

5 22. A composition according to claim 1 substantially as hereinbefore defined.

23. Use of a composition as claimed in any one of the preceding claims as a refrigerant in a refrigeration apparatus.

10 24. The process for producing refrigeration which comprises condensing a composition as claimed in any one of claims 1 to 22 and thereafter evaporating the composition in the vicinity of a body to be cooled.

25. A refrigeration apparatus containing, as refrigerant, a composition as claimed in any one of claims 1 to 21.

ABSTRACT


5 Refrigerant compositions are disclosed which comprise:

(a) pentafluoroethane, trifluoromethoxydifluoromethane or hexafluoro-cyclopropane, or a mixture of two or more thereof, in an amount of from 60 to 70% by weight based on the weight of the composition,

10 (b) 1,1,1,2- or 1,1,2,2-tetrafluoroethane, trifluoromethoxypentafluoroethane, 1,1,1,2,3,3-heptafluoropropane or a mixture of two or more thereof, in an amount of from 26 to 36% by weight based on the weight of the composition and


15 (c) an ethylenically unsaturated or saturated hydrocarbon, optionally containing one or more oxygen atoms, with a boiling point from -12°C to $+10^{\circ}\text{C}$, or a mixture thereof, or a mixture of one or more said hydrocarbons with one or more other hydrocarbons, said mixture having a bubble point from -12°C to $+10^{\circ}\text{C}$, in an amount from 1% to 4% by weight based on the weight of the composition.

GRAPH 1 THE SATURATED VAPOUR PRESSURES OF R22 COMPARED TO
THOSE OF THE R125/134A HYDROCARBON BLENDS

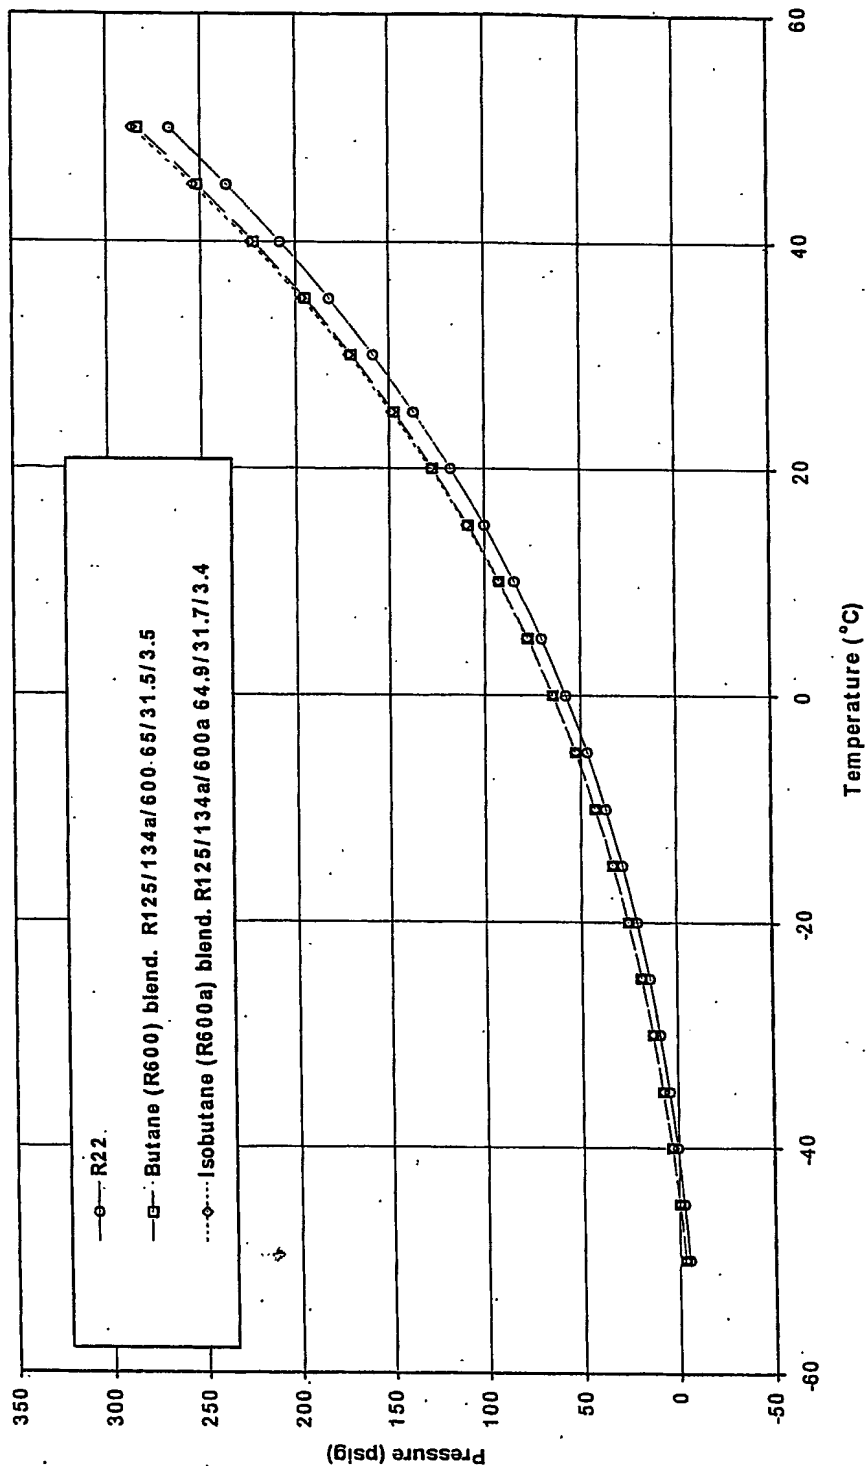


GRAPH 1

GRAPH 2 PERCENTAGE DEVIATION IN CAPACITY FROM R22 FOR THE
HYDROCARBON BLENDS BASED ON A MEAN EVAPORATING TEMPERATURE OF -30°C

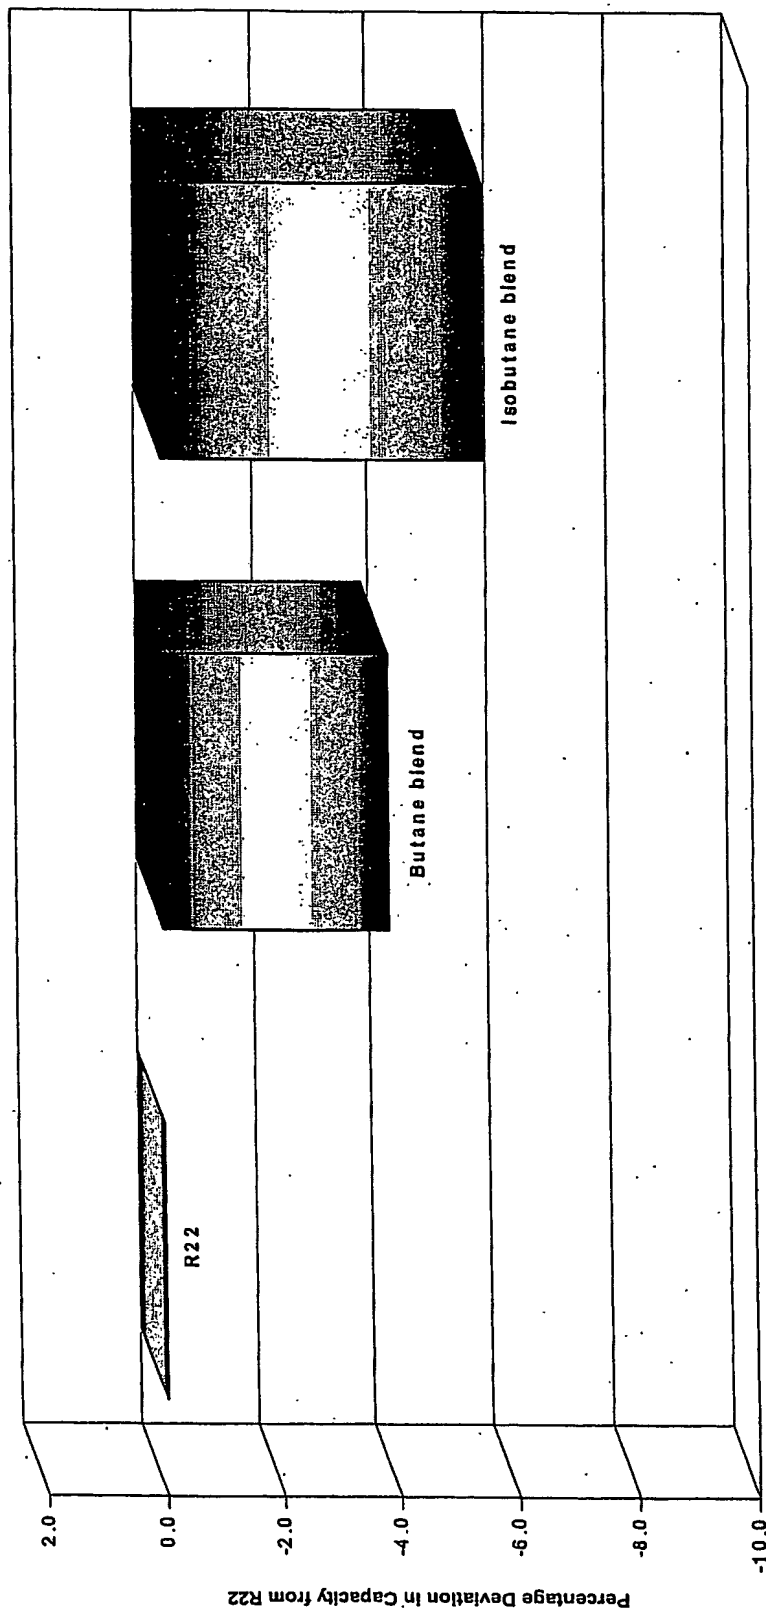


GRAPH 2

GRAPH 3 PERCENTAGE DEVIATION IN COP FROM R22 FOR THE HYDROCARBON
BLENDS BASED ON A MEAN EVAPORATING
TEMPERATURE OF -30 °C

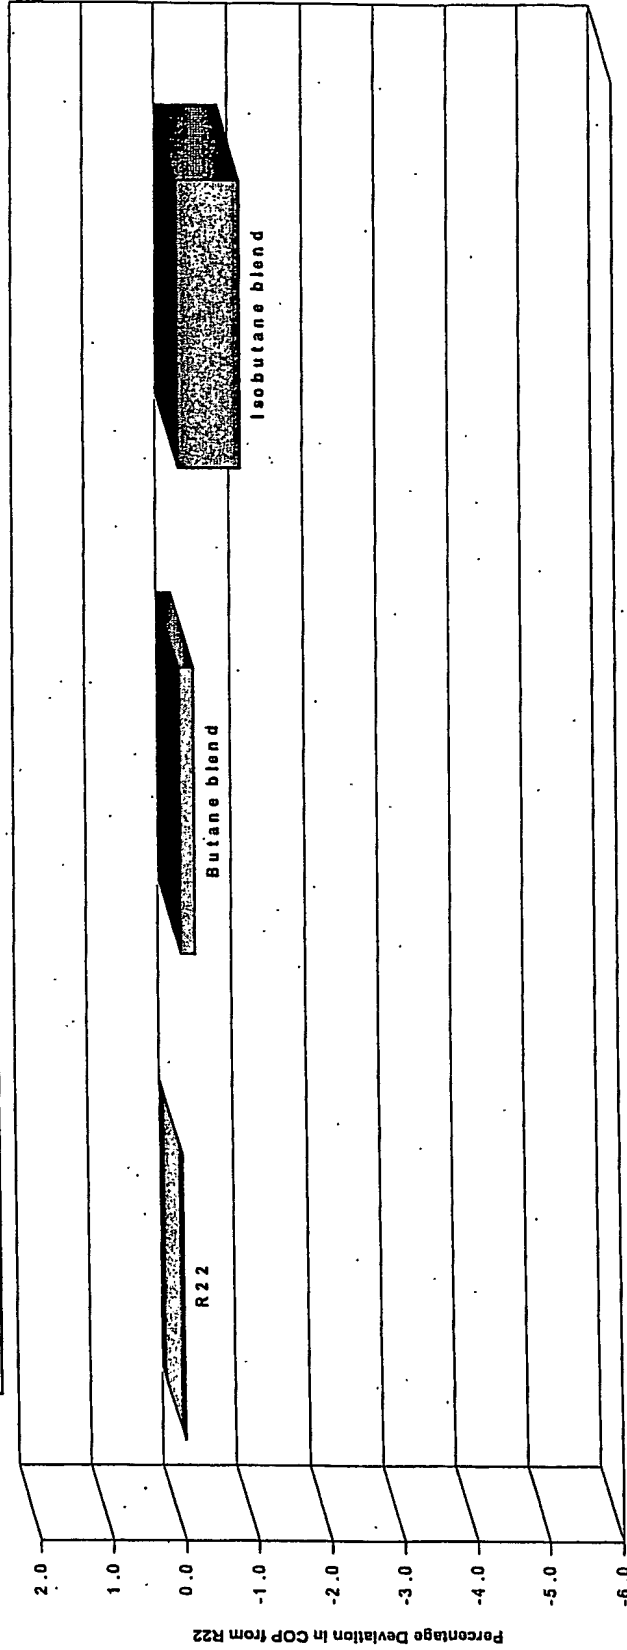


GRAPH 3 /

GRAPH 4 PERCENTAGE DEVIATION IN COP FROM R22 FOR THE HYDROCARBON
BLENDS BASED ON THE CAPACITY OF R22 AT A MEAN EVAPORATING
TEMPERATURE OF -30°C

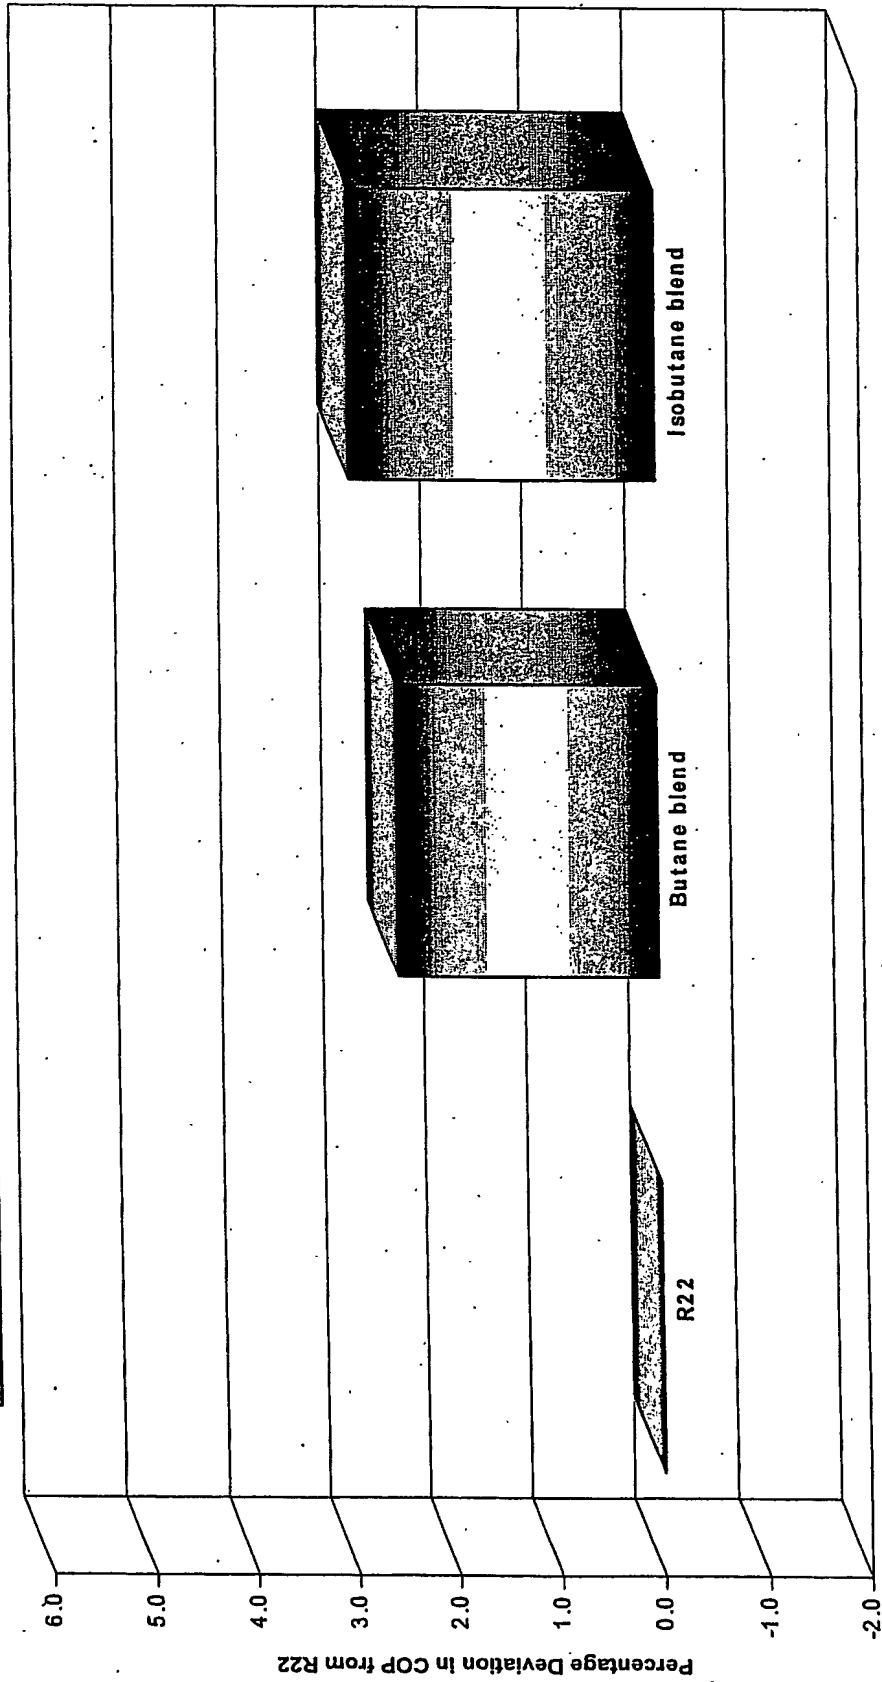


GRAPH 4.

GRAPH 5 PERCENTAGE DEVIATION IN CAPACITY FROM R22 FOR THE HYDROCARBON
BLENDS BASED ON THE MEAN EVAPORATING TEMPERATURE

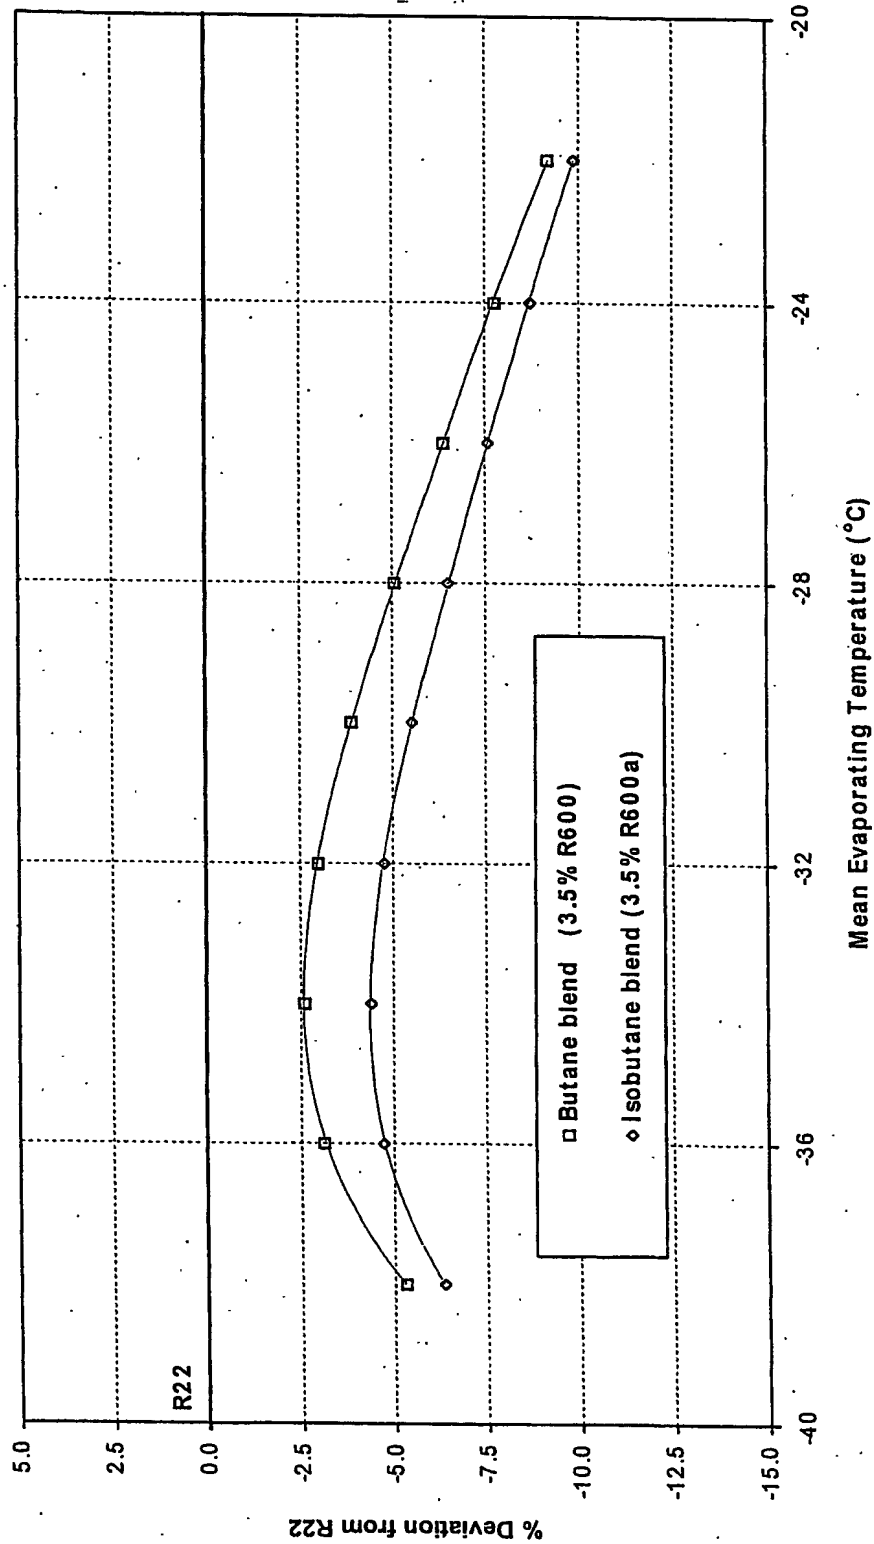

GRAPH 5

GRAPH 6 PERCENTAGE DEVIATION IN COP FROM R22 FOR THE HYDROCARBONS
BLENDS BASED ON THE MEAN EVAPORATING TEMPERATURE

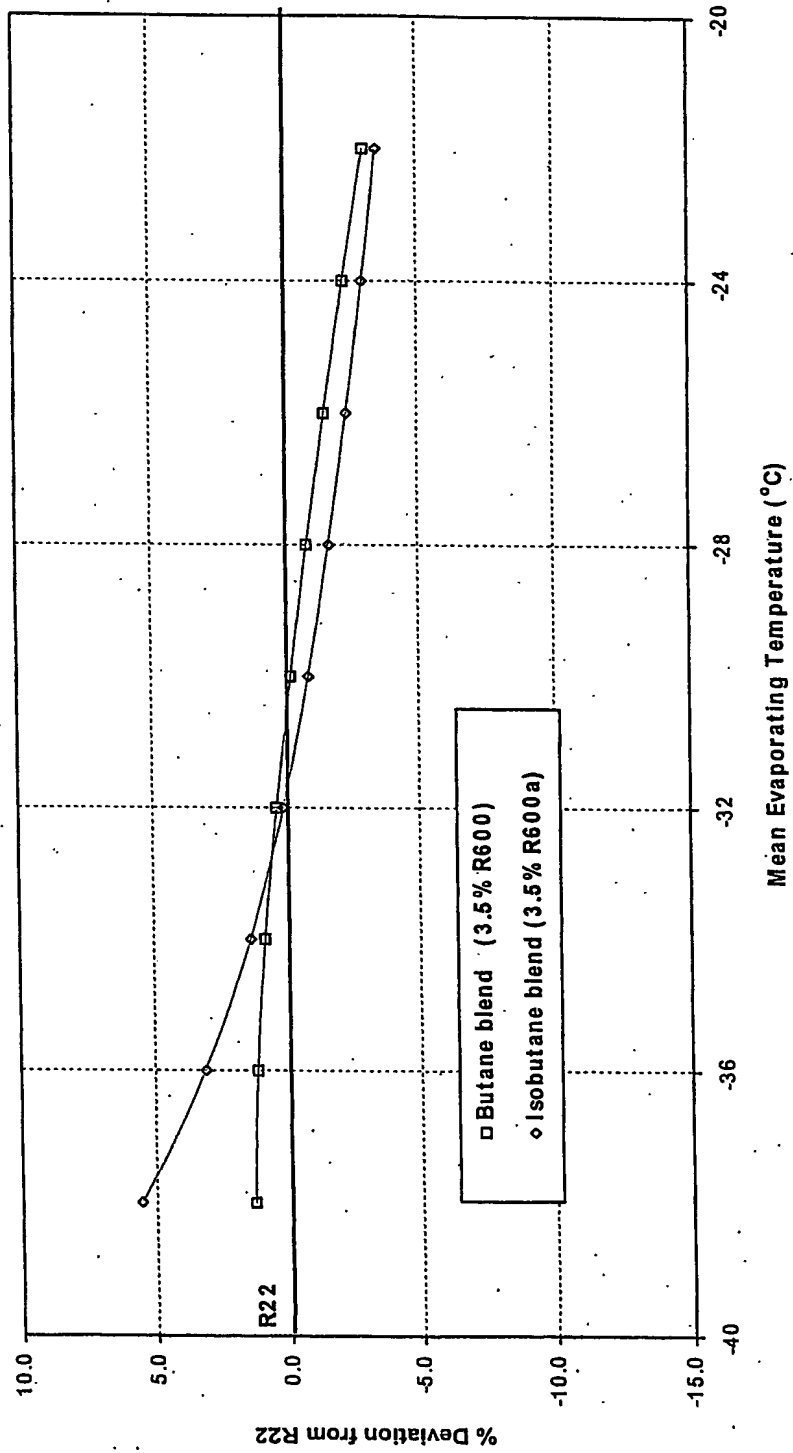

GRAPH 6